

LRP Column jibs


300 degrees action radius.

1) Optional extension up to 1000 mm, at extra cost. 2) According to specifics of hoist

Load	Cranetype	A ¹⁾	B ¹⁾	C ²⁾	D	E	F	G	H	J	K	L	M	O	Crane weight
LRP															
		Kg													
63 Kg	2/63	3000	2448		125	220	20	100	90	280	260	2000	525	18	95
	3/63	3000	2448		125	220	20	100	90	280	260	3000	585	18	105
	4/63	3000	2448		125	220	20	100	90	280	260	4000	585	18	115
	5/63	3000	2457		125	255	20	111	100	310	290	5000	670	18	180
	6/63	3000	2457		125	255	20	111	100	310	290	6000	730	18	195
125 Kg	2/125	3000	2448		125	220	20	100	90	280	260	2000	525	18	95
	3/125	3000	2448		125	220	20	100	90	280	260	3000	585	18	105
	4/125	3000	2457		125	255	20	111	100	310	290	4000	610	18	165
	5/125	3000	2457		125	255	20	111	100	310	290	5000	670	18	180
	6/125	3500	2706		125	310	25	140	125	390	365	6000	800	28	260
7/125	3500	2706		125	310	25	140	125	390	365	7000	860	28	273	
250 Kg	2/250	3000	2457		125	255	20	111	100	310	290	2000	550	18	135
	3/250	3000	2457		125	255	20	111	100	310	290	3000	610	18	150
	4/250	3500	2706		125	310	25	140	125	390	365	4000	680	28	230
	5/250	3500	2706		125	310	25	140	125	390	365	5000	740	28	243
	6/250	3500	2706		125	360	25	161	140	440	420	6000	850	28	330
7/250	3500	2706		125	360	25	161	140	440	420	7000	910	28	345	
500 Kg	2/500	3500	2690		250	310	25	140	125	390	365	2000	745	28	200
	3/500	3500	2706		250	310	25	140	125	390	365	3000	805	28	215
	4/500	3500	2690		250	360	25	161	140	440	420	4000	850	28	300
	5/500	3500	2706		250	360	25	161	140	440	420	5000	910	28	315
	6/500	4000	2933		140	415	30	195	178	550	510	6000	860	40	580
7/500	4000	2933		140	415	30	195	178	550	510	7000	920	40	610	
1000 Kg	2/1000	3500	2690		300	360	25	161	140	440	420	2000	830	28	285
	3/1000	3500	2690		300	360	25	161	140	440	420	3000	890	28	310
	4/1000	4000	2933		300	415	30	195	178	550	510	4000	900	40	530
	5/1000	4000	2933		300	415	30	195	178	550	510	5000	960	40	560
	6/1000	4000	2933		300	480	30	224	198	620	585	6000	1140	40	730
7/1000	4000	2933		300	480	30	224	198	620	585	7000	1200	40	765	


www.TAWI.se

TAWI Box 10205 434 23 KUNGSBACKA tel +46(0)300 185 00 fax +46(0)300 189 90 info@tawi.se
LYFTMAN Propellervägen 4A 183 62 TÄBY tel +46 (0)8 446 48 50 fax +46(0)8 446 48 55

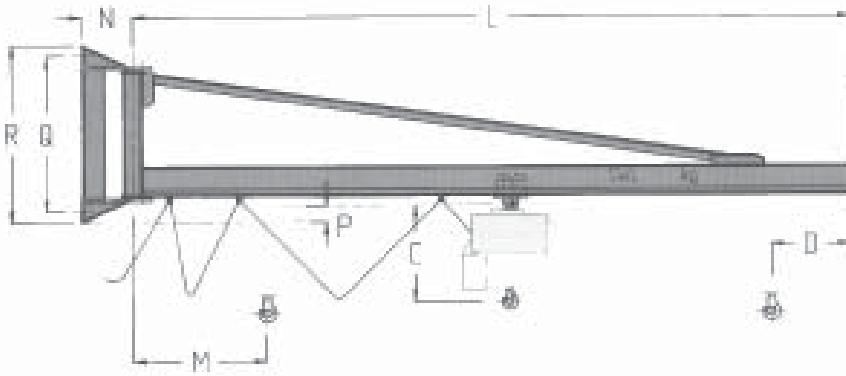

LRV Wall jibs

180/270 degrees action radius



Load	Cranetype	C ²⁾	D	L	M	N	P	Q	R	S	T	U	V	X	Bracket	Crane weight
LRV																
															Type	kg
63	2/63		125	2000	525	170	49	594	644	25	15	150	25	200	1	60
	3/63		125	3000	585	170	49	594	644	25	15	150	25	200	1	70
	4/63		125	4000	585	170	49	594	644	25	15	150	25	200	1	80
	5/63		125	5000	670	170	79	594	644	25	15	150	25	200	1	115
	6/63		125	6000	730	170	58	594	644	25	15	150	25	200	1	130
	2/125		125	2000	525	170	49	594	644	25	15	150	25	200	1	60
125	3/125		125	3000	585	170	49	594	644	25	15	150	25	200	1	70
	4/125		125	4000	610	170	58	594	644	25	15	150	25	200	1	100
	5/125		125	5000	670	170	79	594	644	25	15	150	25	200	1	115
	6/125		125	6000	800	210	79	870	930	30	22	190	30	250	2	165
250	7/125		125	7000	860	210	79	870	930	30	22	190	30	250	2	178
	2/250		125	2000	550	170	58	594	644	25	15	150	25	200	1	70
	3/250		125	3000	610	170	58	594	644	25	15	150	25	200	1	85
	4/250		125	4000	680	210	79	870	930	30	22	190	30	250	2	135
	5/250		125	5000	740	210	79	870	930	30	22	190	30	250	2	148
	6/250		125	6000	850	210	79	870	930	30	22	190	30	250	2	175
500	7/250		125	7000	910	210	79	870	930	30	22	190	30	250	2	190
	2/500		250	2000	745	210	63	870	930	30	22	190	30	250	2	105
	3/500		250	3000	805	210	79	870	930	30	22	190	30	250	2	120
	4/500		250	4000	850	210	63	870	930	30	22	190	30	250	2	145
	5/500		250	5000	910	210	79	870	930	30	22	190	30	250	2	160
	6/500		140	6000	860	255	93	1160	1240	40	34	220	40	300	3	325
1000	7/500		140	7000	920	255	93	1160	1240	40	34	220	40	300	3	355
	2/1000		300	2000	830	210	63	870	930	30	22	190	30	250	2	130
	3/1000		300	3000	890	210	63	870	930	30	22	190	30	250	2	155
	4/1000		300	4000	900	255	93	1160	1240	40	34	220	40	300	3	275
	5/1000		300	5000	960	255	93	1160	1240	40	34	220	40	300	3	305
	6/1000		300	6000	1140	255	93	1160	1240	40	34	220	40	300	3	360
	7/1000		300	7000	1200	255	93	1160	1240	40	34	220	40	300	3	395